


Convolute diaphragms

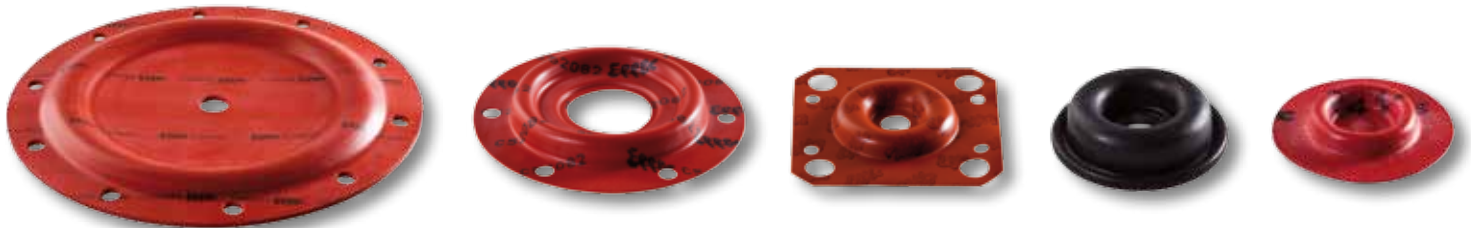

• Characteristics:

- pressure loadable in loop direction
- small effective surface change
- average stroke
- $H_{max} \leq 0.19 \times DW$
- low hysteresis
- no stick-slip effect
- design part for sealing function
- very long working lifetime

• Design:

- of coated fabric RECIFLEX®
- fabric reinforced
- rubber sole

• Functions:

- regulation
- dosing
- control and measurement
- valve

• Construction and dimensions:

